


THRESHOLD DETAIL

**MINIMUM 2" X 2" "Z" FLASHING
(RISE MEASURED AT THE HEIGHT OF THE
DOOR SIL). FLASHING NAILED AT A
MINIMUM OF 2 1/2" BETWEEN NAILS**

**62.5 MILS (1/16") OF TUFFLEX
WATERPROOFING SYSTEM. IF POSSIBLE
TAKE MEMBRANE IN TO BUILDING 12".
THIS WILL PROTECT IF WATER PENETRATES
THROUGH WINDOW OR DOOR**

**3/4" ACX PLYWOOD: SET ON STANDARD
JOIST, BLOCKED SEAMS, FASTENED WITH
2" SCREWS OR RING SHANK NAILS**

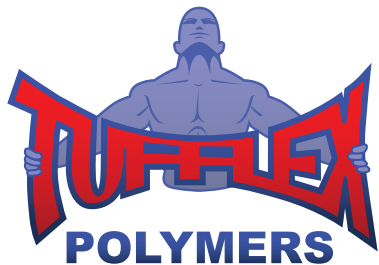

TUFFLEX POLYMERS

10880 Poplar Avenue, Fontana, CA 92337
Phone: (909) 349-2016 | (888) TUFFLEX
Fax: (909) 823-6309
www.tufflexpolymers.com

TUFFLEX Polymers provides this schematic detail as a recommended guide only. It does not provide a specific solution for all projects since conditions vary from one project to another.

THRESHOLD DETAIL